

RO-MC-OO1/RO-MC-OO1R User Manual

Diagrams

RC-MC-001

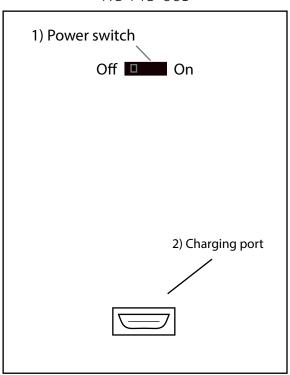


- 1) Powers the device on or off
- 2) Micro-USB charging port for internal 2000 mAh bat



3) Male XLR connection to rotating component of mic clip* tery

RC-MC-001R (Remote)

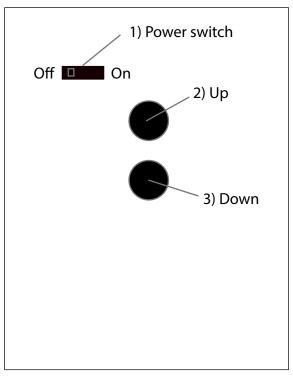

Top View

Side view

- 1) Powers the device on or off
- 2) Increases the angle of the mic by 10°
- 3) Decreases the angle of the mic by 10°



4) Micro-USB charging port for internal 150 mAh battery

Basic Usage

The two included components will automatically pair together once both are powered on. Begin by attaching the clip onto the stand. The clip uses a standard 5/8 thread size. Once the clip is attached, attach the the rest of the clip using the attached clamp. Once the components are attached, simply press the buttons on the remote to adjust the angle of the mic clip.

 * DO NOT PLUG ANY OTHER DEVICE INTO THIS JACK